


Terrel 1 CF

Explotions Drawing- Spare Parts- Standards

ITEM NO.	Filename	QTY.	Torque
1	001994-AU_Frame_Terrel_CF_1	1	
2	_Fork_Terrel	1	
3	000019-AA_Bolt_M4x10_countersunk	4	3 Nm
4	002317-AA_Bolt_M5x12custom	7	6 Nm
5	001980-AB_Front axle_100_12P1_124	1	18 Nm
6	002020-AB_Rearaxle_142_12P1_170	1	18 Nm
7	002015-AA_Hanger_Front_DS	1	
8	001739-AA_UDH hanger	1	20 Nm
9	002220-AD_CS_protector	1	
10	002373-AA_Frame_pocket_complete	1	
11	002228-AD_DT_protector	1	
12	002324-AA_Cable_grommet_5mmX0	19	
13	002365-AB_Pocket_Frame	1	
14	002434-AA_Nut_M3x5custom	2	

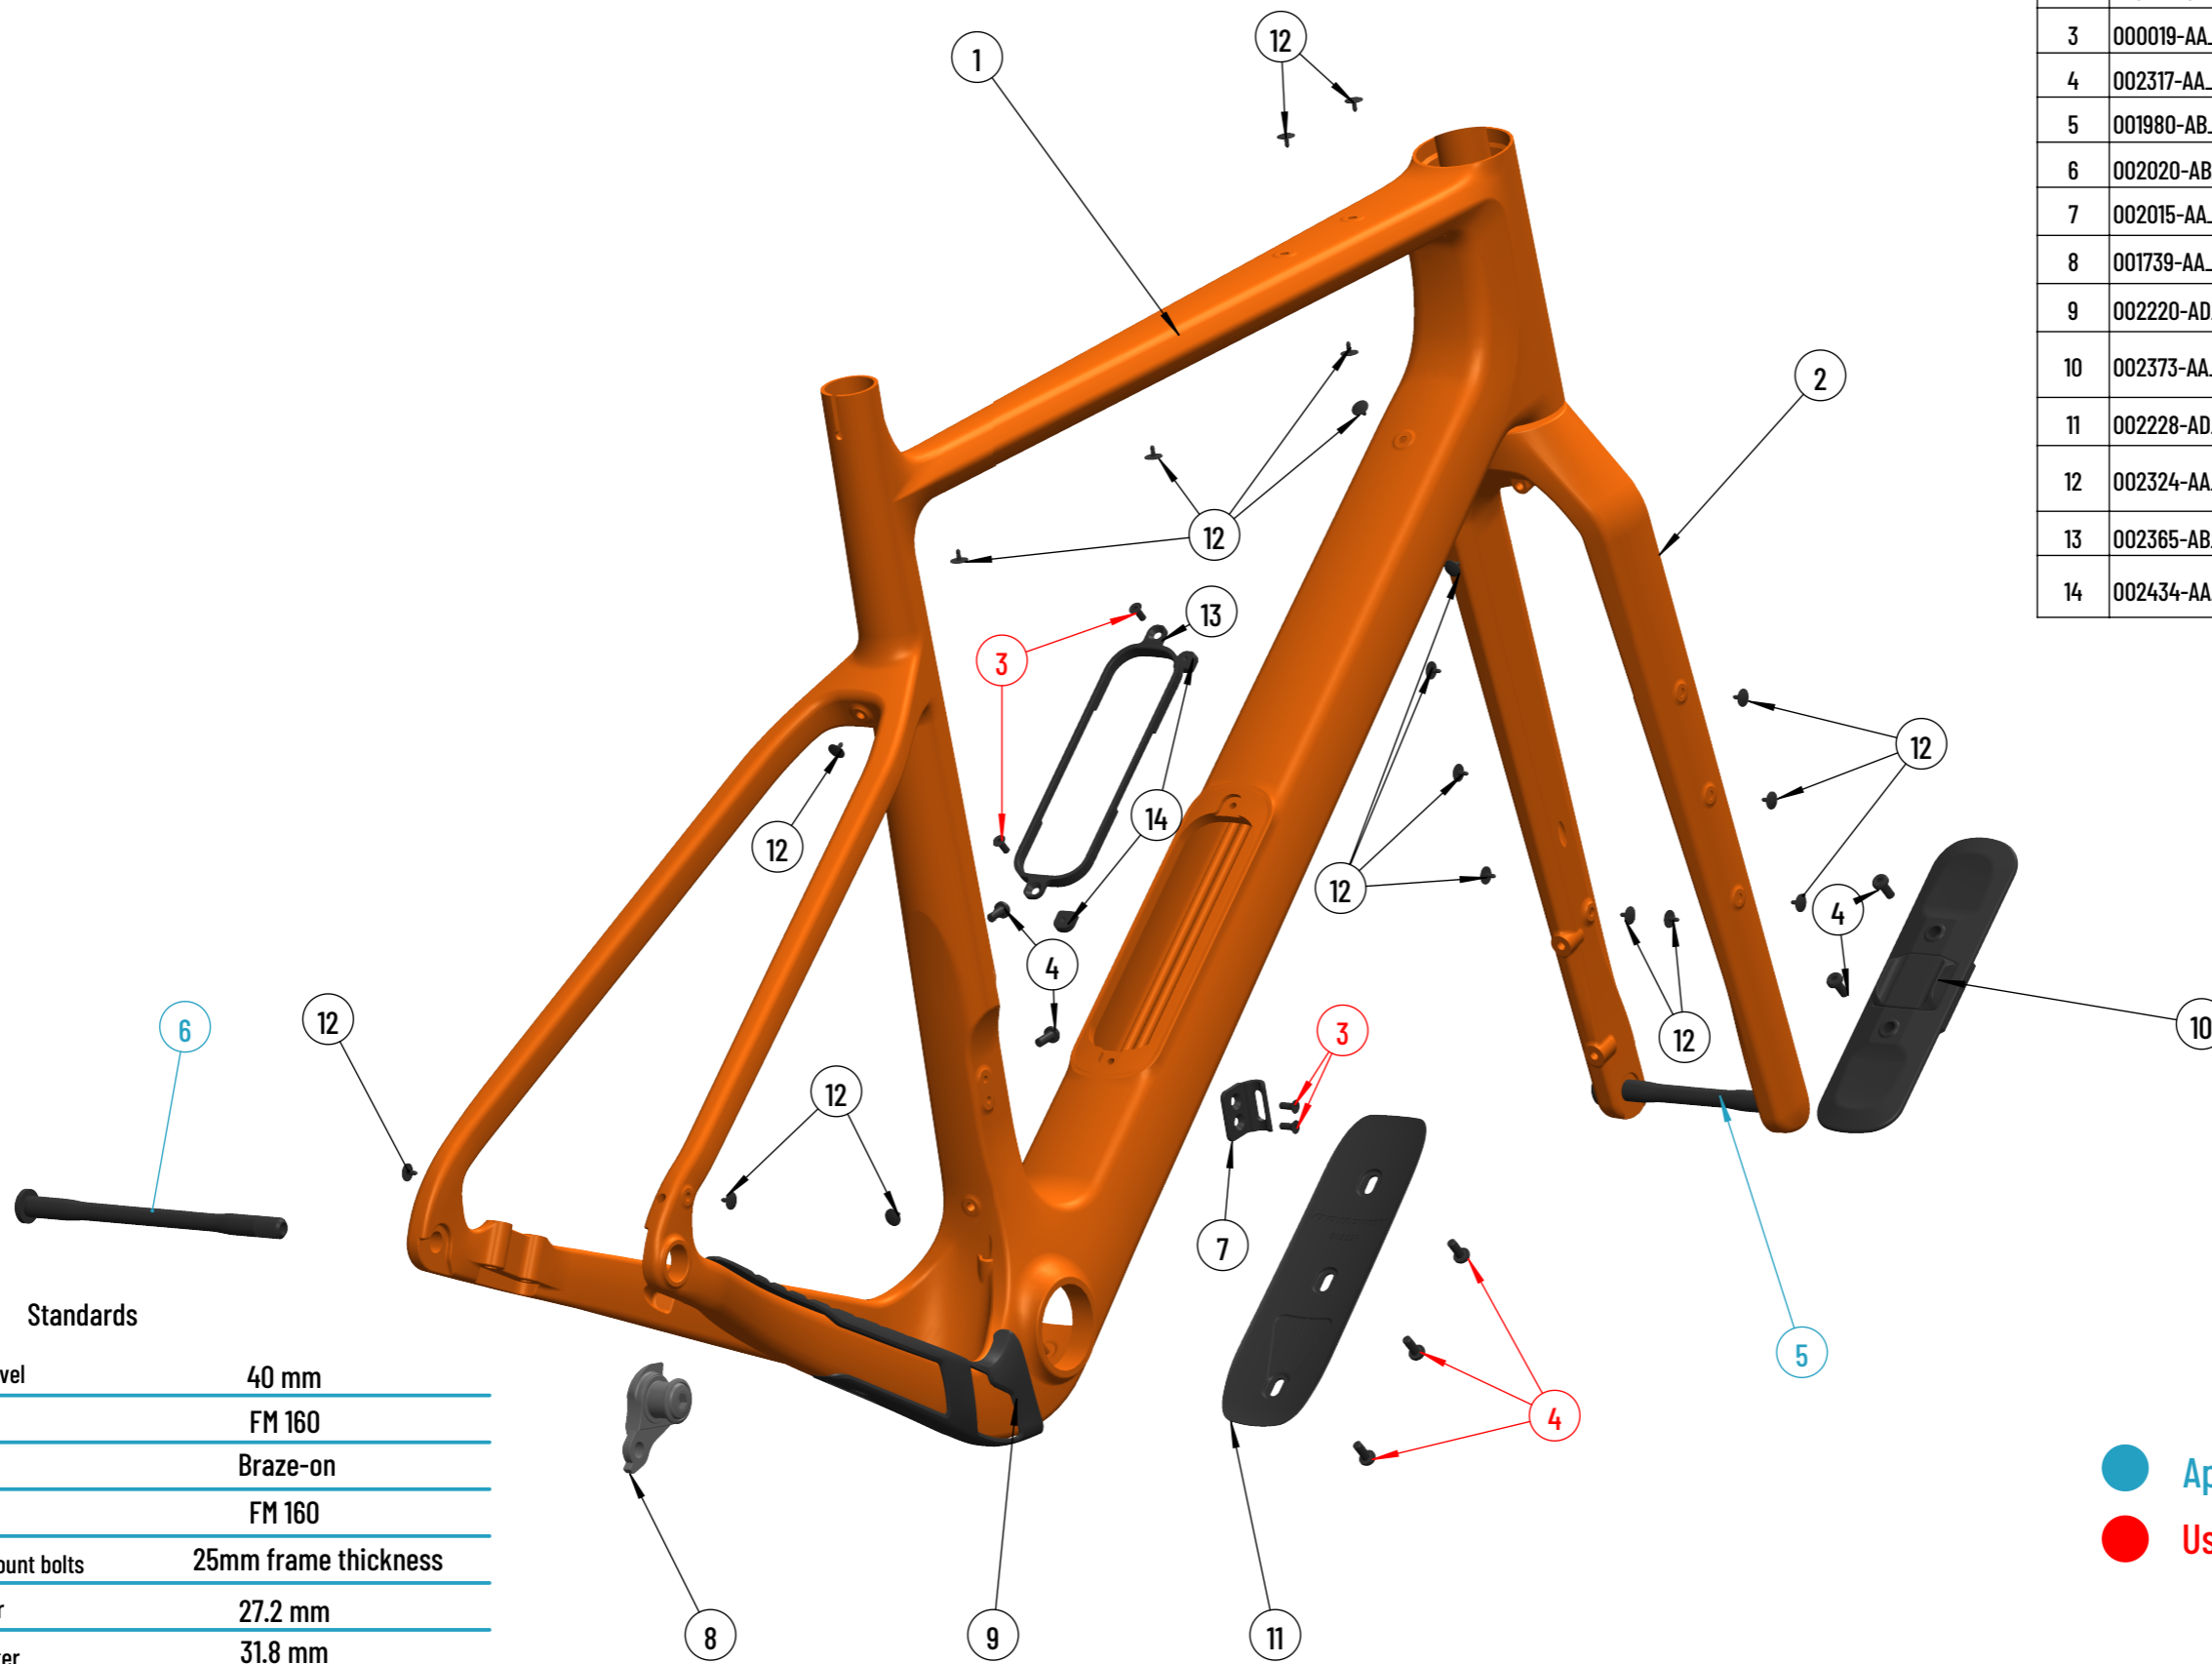

Standards

Fork maximum travel	40 mm
Fork brake mount	FM 160
Front derailleur	Braze-on
Rear brake mount	FM 160
Rear brake flat mount bolts	25mm frame thickness
Seat post diameter	27.2 mm
Seat clamp diameter	31.8 mm
Head set (S.H.I.S)	IS 52 IS 52
Rear hub width	142 mm
Rear wheel axle	M12x1
Tires max size	50 mm

- Apply grease
- Use Loctite 243 on thread

PROPAIN